USGG-T5-A

INTEGRATED T5 LED FIXTURE

Mechanical Specifications

Beam Angle: 120°
On-board Isolated power supply
North America and Europe safety wired

Features

Ideal for under counter and cove lighting
Light Source: SMD 3014
Housing: AL + Strengthen PC cover
Lifespan: >50,000hrs
Up to 70% Energy Saving Consumption
High Brightness
Easy Installation
Extended Life
Instant On
High Shock
Vibration Resistance
No Buzzing
No Mercury
No Radio Frequency Interference
No Flickering

Connectable end unit

RoHS

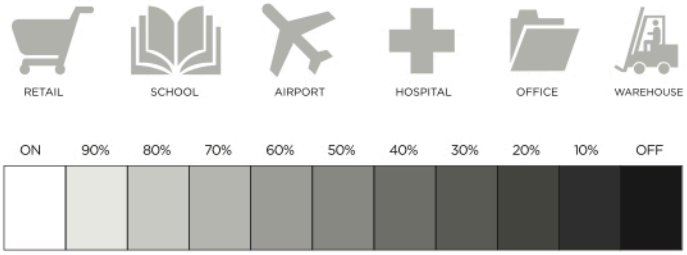

CCT
Ultra Warm White -2800k
Warm White - 3500k
Natural White - 4000k
Cool White - 5000k

Specifications

Model	Power	Dimension (mm)	LED Quantity (pcs)	Luminous (Frosted lens)		Voltage	Efficacy	Input Power Factor	CRI
USGG-24-T5A-11W	11W	18*549 (2FT)	108	1155	1265	100-277V	115	0.93	80
USGG-36-T5A-17W	17W	18*849 (3FT)	168	1785	1955	100-277V	115	0.93	80
USGG-48-T5A-20W	20W	18*1149 (4FT)	216	2100	2300	100-277V	115	0.93	80
USGG-60-T5A-24W	24W	18*1449 (5FT)	240	2520	2760	100-277V	115	0.93	80