




## "T" STYLE BASKET STRAINERS



Inlet Dia.	Outlet Dia.	A	B	C	D	E
4"	4"	9-1/4"	14"	12"	21 1/2"	7 1/4"
6"	6"	11 1/4"	16"	15 1/2"	25 1/4"	9 1/4"
8"	8"	13 1/4"	20"	17 1/2"	30 1/4"	11 1/4"
10"	10"	15 1/4"	24"	21 1/2"	34 3/4"	13 1/2"
12"	12"	17 1/4"	26"	23"	37 1/2"	15 3/4"
14"	14"	23 1/4"	32"	31"	48"	21 3/4"
16"	16"	23 1/4"	32"	31"	48"	21 3/4"
18"	18"	23 1/4"	32"	31"	48"	21 3/4"
20"	20"	23 1/4"	32"	32 1/2"	48"	21 3/4"

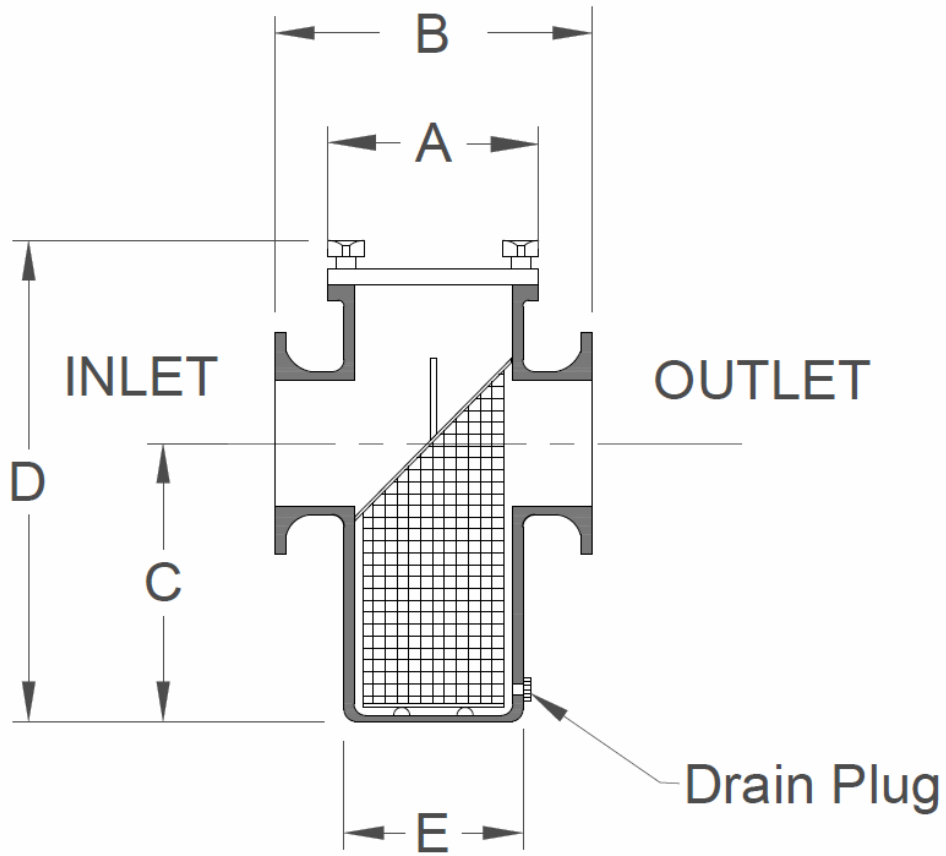

## "T" STYLE BASKET STRAINERS

### MATERIALS OF CONSTRUCTION

1. **Strainer Body:** Fiberglass reinforced plastic construction with C-veil liner and isophthalic polyester resin.
2. **Flanges:** 3/4" thick w/150 lb. drilling patterns.
3. **Lid:** 4"-12" Clear acrylic, 14"-18" FRP with clear acrylic view port
4. **O-Ring:** Ethylene Propylene
5. **Hand Knobs:** ABS w/Bronze Inserts
6. **Basket:** 316 stainless steel v-wire w/ 3/16" square openings (62% open area)
7. **Pressure Rating:** 50 psi