



thermaduct®

HIGH EFFICIENCY AIR DISTRIBUTION

thermaduct

thermaround


inspirallR

FLOVAL

OUTDOOR DUCT **SOLVED**

AIR DISTRIBUTION **SOLVED**



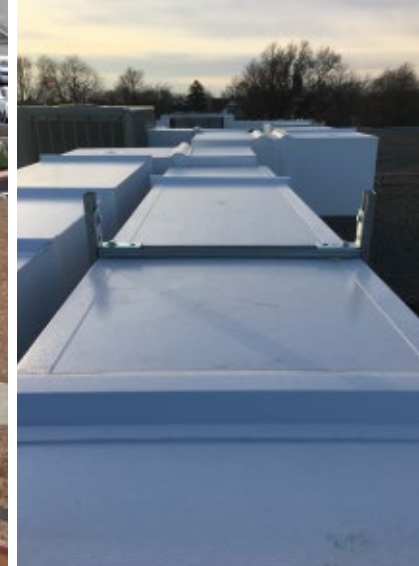

thermaductTM

OUTDOOR RECTANGULAR

Thermaduct is our rectangular outdoor ducting solution that offers high R-values and low air leakage. It provides the duct, the insulation and cladding all in one high performance product. Thermaduct is available in insulated values between R-8 and R-24 and offers extremely low air leakage. All these benefits are protected by a strong, UV stable 1000 micron vinyl cladding.

R8 THROUGH R24

1000 MICRON, UV STABLE VINYL CLADDING

CLOSED CELL INSULATION

NEAR ZERO AIR LEAKAGE

10 YEAR LIMITED WARRANTY

www.thermaduct.com





thermaround[™]

OUTDOOR ROUND

Thermaround is our round solution for outdoor applications. This high R-value system offers an R-12 solution with extremely low air leakage. Thermaround uses the same UV stable 1000 micron vinyl cladding for a durable solution that will naturally shed water. In the interior, air passes over a smooth aluminum surface free from loose fibers to give your building better IAQ performance.

R12 INSULATED VALUE

NATURALLY SHEDS WATER

1000 MICRON, UV STABLE VINYL CLADDING

CLOSED CELL INSULATION

NEAR ZERO AIR LEAKAGE

10 YEAR LIMITED WARRANTY

www.thermaduct.com





inspiralR™

INDOOR ROUND

InspiralR is our indoor round solution that is UL 181 Listed for 10" w.c. positive and 8" w.c. negative applications. InspiralR is a lightweight system and can offer up to a 75% weight savings versus traditional double wall spiral duct. This ultra low air leakage system also provides an R-6 insulated value.

UL 181 LISTED ROUND DUCT SYSTEM


NEAR ZERO AIR LEAKAGE

PRE-INSULATED R-6 INSTALLED VALUE

UP TO 75% LIGHTER THAN DOUBLE WALL

10 YEAR LIMITED WARRANTY

www.thermaduct.com

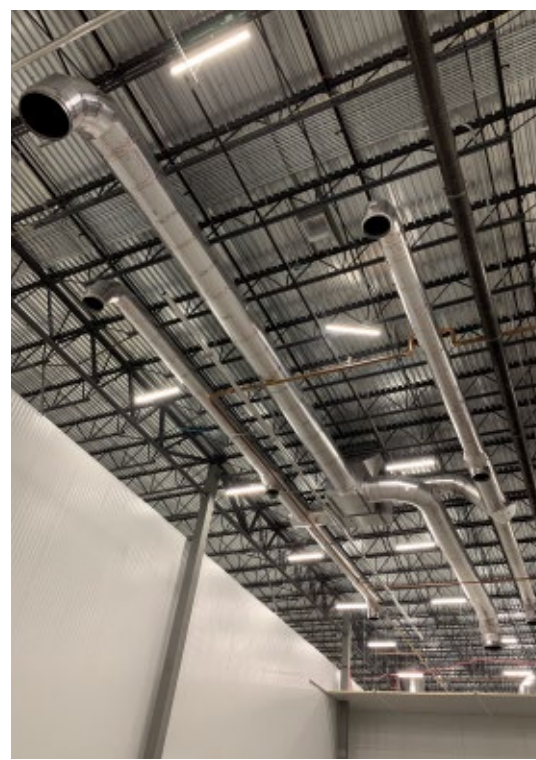



FLOVAL™

INDOOR FLAT OVAL

Floval is our indoor flat oval solution that is UL 181 Listed for 10" w.c. positive and 8" w.c. negative applications. Floval is lightweight and easy to install. This ultra low air leakage system provides an R-6 insulated value. Tight for ceiling space? Floval is your solution!

UL 181 LISTED ROUND DUCT SYSTEM

NEAR ZERO AIR LEAKAGE

PRE-INSULATED R-6 INSTALLED VALUE

UP TO 75% LIGHTER THAN DOUBLE WALL

10 YEAR LIMITED WARRANTY

www.thermaduct.com